


- NOTES:**
- MATERIALS:**
 - HOOD, GLAND, COMPR.-RING: ABS UL94 V-0 METALLIZED
 - FRONTSEALING: SILICONE VMQ BLUE
 - CABLE SEALING: NBR BLACK
 - JACK-SCREW: STAINLESS STEEL
 - O-RING: NBR BLACK
 - CABLE STRAIN RELIEF: STEEL, NI-PLATED
 - SCREWS: STEEL, NI-PLATED
 - SHIELDING BRACKET: CU-ALLOY, NI-PLATED
 - TEMPERATURE RANGE: -30°C TO +80°C
 - RECOMMENDED TORQUE FOR SCREW:
 - 35Ncm (3.1 in.LB)
 - MAX. TORQUE: 68Ncm (6 in.LB)
 - SINGLE PACKED

* COMPLETELY TIGHTENED

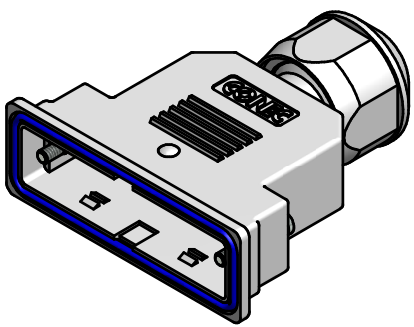

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance	±0,3 unless otherw. specified	dim. in mm	scale:	1,5:1 (1:1)		
				date	07.02.2014	name	Heinrich	material:	SEE NOTES	
				drawn	07.02.2014	name	Huether	title:	WATER RESISTANT D-SUB HOOD SHIELDED 25 POS.	
				appd.	07.02.2014	norm		SHORT SCREW 4-40UNC STAINLESS STEEL		
1 x b	Å 5093	12.03.14	Heinrich	d-old	15K1A1155	dwg no:		DIN-A3		
a	Origin			CONEC				sh: 1		
rev.	description	date	name				part no:	15K1A1444	15-004830	